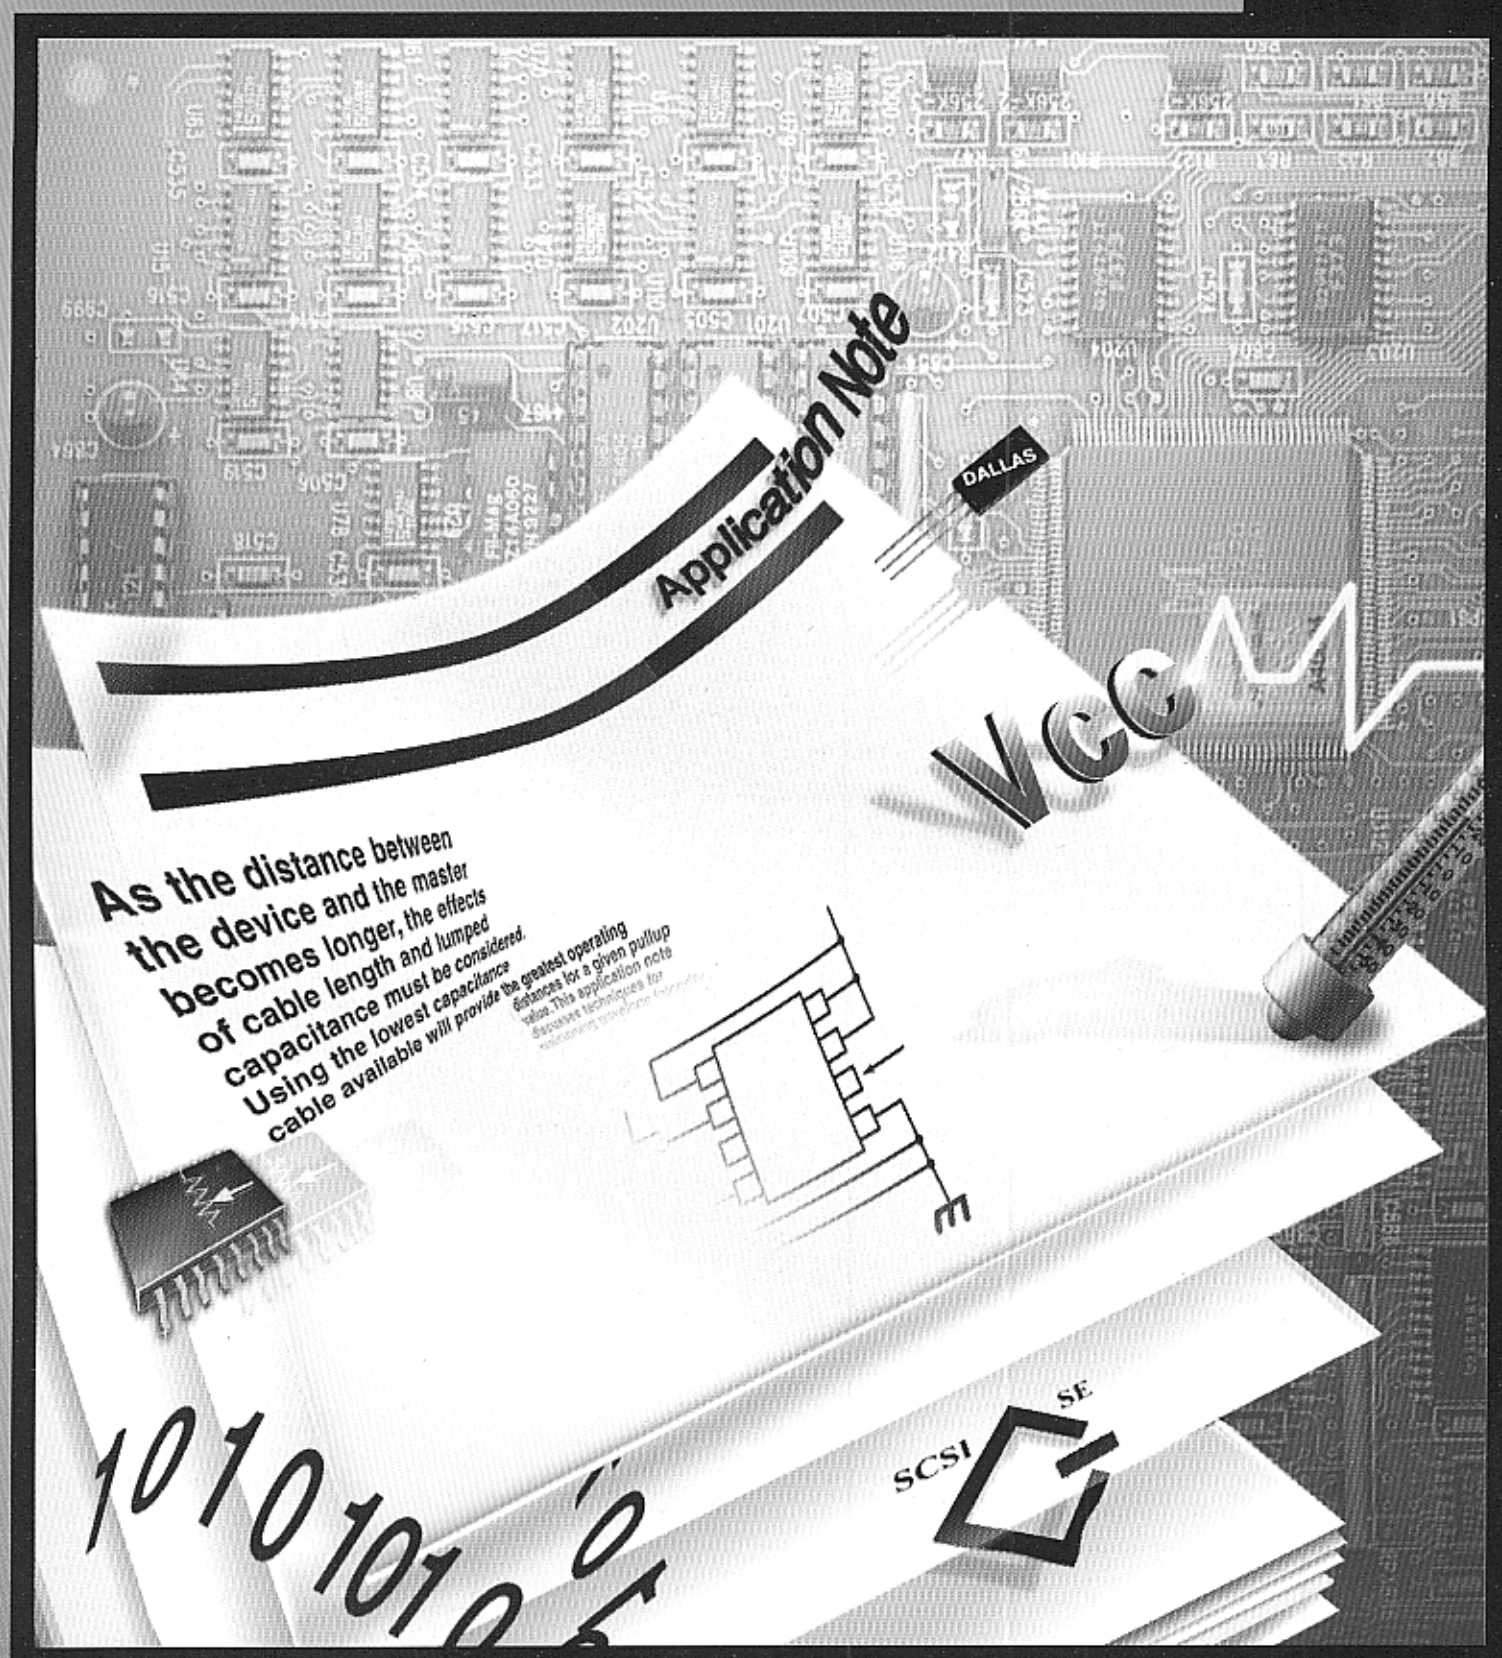
Application Note
DALLAS
VCC
As the distance between the device and the master becomes longer, the effects of cable length and lumped capacitance must be considered. Using the lowest capacitance cable available will provide the greatest operating distances for a given pullup value. This application note discusses techniques for
SCSI
SE

Application Note Book

DALLAS SEMICONDUCTOR

TABLE OF CONTENTS

TIMEKEEPING

DS1213, DS1216, DS1613 Smart Socket/Smart Watch Options (Note 4) 2
Recording Power Cycling Information Using the DS1602/DS1603 (Note 30) 7
Using the Dallas Phantom Real Time Clocks (Note 52) 10
Crystal Considerations with Dallas Real Time Clocks (Note 58) 23
Watchdog Timekeeper (Note 66) 30
DS1585/87, DS1685/87 and DS17x85/87 Accessing Extended User RAM via Software (Note 77) 38
Using the Dallas Trickle Charge Timekeeper (Note 82) 41
Using the PC Clock Extended Features (Note 90) 47
DS1670 Portable System Controller (Note 100) 58

NONVOLATILE MEMORIES

How to Save Data During a Power Failure Without Corrupting It (Note 51) 64
Designing a Nonvolatile 2M x 16 Memory Subsystem (Note 53) 67
RAMport (Note 61) 71
Using Nonvolatile Static RAMs (Note 63) 75

SILICON TIMED CIRCUITS

DS1020/1 8–Bit Programmable Delay Lines (Note 107) 88
Pulse–Doublers Using the DS1012 Delay Line with Logic (Note 1) 109
Device Characteristics of the DS1045 Dual 4–Bit Programmable Delay Line (Note 3) 115
Design Considerations for All–Silicon Delay Lines (Note 14) 133

THERMAL AND BATTERY MANAGEMENT

Increasing Charging Current and Voltage for the DS1633 Battery Recharger (Note 54) 146
Applying and Using the DS1620 in Temperature Control Applications (Note 67) 153
Increasing Temperature Resolution on the DS1620 (Note 68) 157
Interfacing the DS1620 to the Motorola SPI Bus (Note 85) 160
High Resolution Temperature Measurement with Dallas Direct–to–Digital Temperature Sensors (Note 105) 163
Related Application Notes 182

AUTOMATIC IDENTIFICATION

Understanding and Using Cyclic Redundancy Checks with Dallas Semiconductor Touch Memory Products (Note 27) 186
Extending the Contact Range of Touch Memories (Note 55) 201
DS1994 Time–In–A–Can (Note 60) 212
Reading and Writing Touch Memories via Serial Interfaces (Note 74) 218
Use of Add–Only Memory for Secure Storage of Monetary Equivalent Data (Note 84) 258
UniqueWare™ Project Setup Manual Revision 2.00B (Note 99) 262
Minimalist Temperature Control Demo (Note 104) 276
Complex MicroLANs (Note 106) 280

TELECOMMUNICATIONS

DS2141A/43/51/53 Three Channel Drop and Insert 296
DS2141A/43/51/53 Interfacing to Fractional T1 and E1 297
DS2151, DS2153 Interfacing to the MC68MH360 QUICC32 298

DS2151/DS2153 Secondary Over–Voltage Protection 299
DS2153 Selectable 75 and 120 Ohm E1 Interface 301
DS2141A/43/51/53 Interfacing to a Non–Multiplexed Bus 302
DS2151, DS2153 Crystal Selection Guide 304
DS2151/DS2153 Transformer Selection Guide 305
DS2141A/DS2151 D4 Framing Applications 307
DS2141A/DS2151 Controlling the FDL 308
DS2151 and DS2153 Initialization 312
DS2141, DS2143, DS21Q41, DS21Q43 Initialization 313
DS2151 and DS2153 Interfacing 314
DS2151 Special Modes 315
DS2153 Special Modes 318

MICROCONTROLLERS

The DS80C320 as a Drop–In Replacement for the 8032 (Note 56) 322
DS80C320 Memory Interface Timing (Note 57) 324
Using the High–Speed Micro's Serial Ports (Note 75) 331
Using Power Management with the DS87C5x0 (Note 78) 344
Using the DS87C530 Real Time Clock (Note 79) 371
Using the High–Speed Micro's Watchdog Timer (Note 80) 393
Memory Expansion with the High–Speed Microcontroller Family (Note 81) 399
High–Speed Micro Memory Interface Timing (Note 89) 412
Microcontroller Design Guidelines for Reducing ALE Signal Noise (Note 91) 418
DS5002FP Memory Expansion Techniques (Note 92) 422
Design Guidelines for Microcontrollers Incorporating NV RAM (Note 93) 428
Using the Secure Microcontroller with EPROM/ROM (Note 94) 430
Using the Secure Microcontroller Watchdog Timer (Note 101) 431
Using the High–Speed Microcontroller as a Bootstrap Loader (Note 102) 434

SCSI TERMINATION

DS2107A SCSI Bus Waveforms (Note 70) 440
DS2107A Thermal Considerations (Note71) 448
DS2107A Power Down Capacitance (Note 72) 450
DS2107A Active Negation (Note 73) 452

DIGITAL POTENTIOMETERS

LCD Contrast Control Using Dallas Semiconductor Digital Potentiometers (Note 69) 456
DS1867 Power Supply Conditioning for EEPROM Wiper Storage (Note 87) 466
Audio Characterization Report for the DS1802 Dual Digital Audio Potentiometer (Note 88) 468

DALLAS SEMICONDUCTOR SALES OFFICES 483

DALLAS SEMICONDUCTOR

4401 South Beltwood Parkway

Dallas, Texas 75244-3292

Tel: 972-371-4448

Fax: 972-371-3715

Literature & Technical Support:
972-371-4167

Sales & Customer Service:
972-371-4969

Automatic Data Sheet Faxback:
972-371-4441

Corporate FTP Site:
ftp://ftp.dalsemi.com

Worldwide Web Site:
http://www.dalsemi.com

E-Mail Communication:
firstname.lastname@dalsemi.com

Sales Site:
sales@dalsemi.com